

ALI7906


Ultra Bright™ 6" Linear Array



- Aii** 3X brighter than the LL5806
- Aii** For use in long distance or large area inspections
- Aii** Wash down option provides IP64 Compliant Design

Ordering Information


Standard Product Variation: Shipped Within Two Weeks

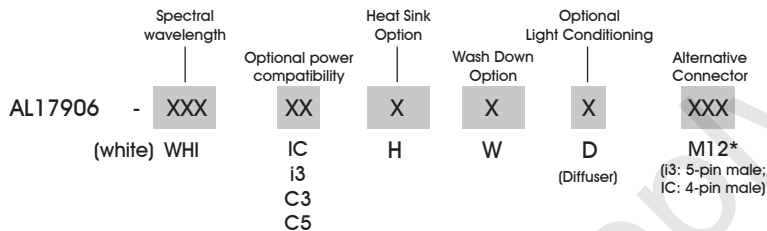

IC = IC5 (requires 24v power supply)
i3 = Combined continuous-on and strobe over-drive (24 volt PS required.)
C3 = Pulsar 710 Connector
C5 = Pulsar 320 Connector
★ Available with IC and i3 options only

Dimensional Information

[Click for Installation Models & Drawings](#)

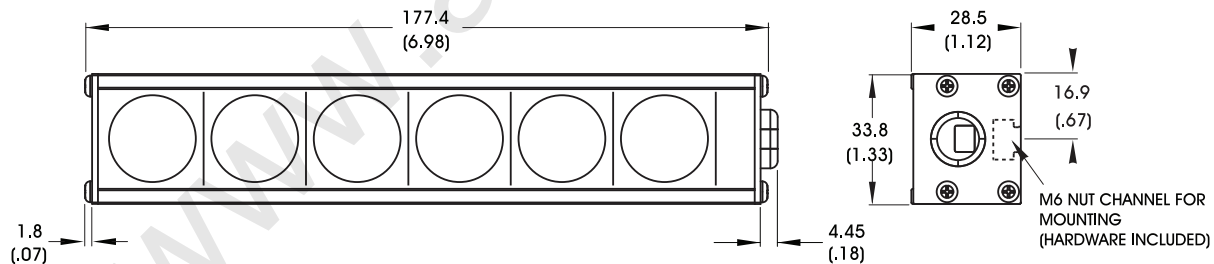

STANDARD CABLE LENGTH: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Accessories

Power Consumption

12W @ 24v DC

General Specifications

Weight: 226.8 g (8.0 oz)
Finish: Black Anodized

Operating Temperature: 0-60 C°
Meet:

advancedillumination.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101