

Analog Camera

KPC-C190NU/NUWX

- 1/3.2" 1.3M SONY STARVIS CMOS
- Horizontal 850TV Lines
- CVBS(1.0Vp-p Composite 75Ω)
- Fixed lens 3.6mm
- WDR, 2DNR
- Digital D&N
- Mini Bullet Camera


Optional

KPC-C190NUB	2.97mm board lens
	3.6mm board lens
KPC-C190NUB/NUWX	6mm board lens
	8mm board lens
	12mm board lens
KPC-C190NUP1	3.7mm conical pinhole
KPC-C190NUP3	3.7mm flat pinhole
KPC-C190NUP4	4.3mm supercone pinhole



KPC-C190NU/NUWX

Dimensions

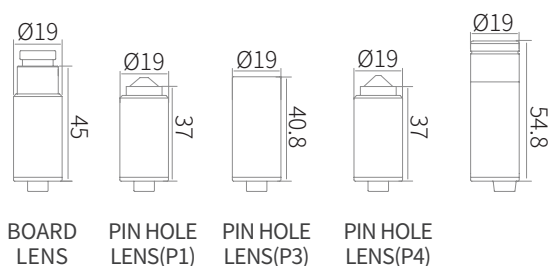

Specifications

		KPC-C190NU	KPC-C190NUWX		
Image Sensor		1/3.2" Exmor RS Progressive Scan SONY STARVIS CMOS		Privacy Mask	-
Effective Pixels		1.27MP 1297(H) x 977(V)		Image Rotation	OFF, H-FLIP, V-FLIP, HV-FLIP
Max. Video Resolution		Horizontal 850TV Lines		Defog	OFF, AUTO
Type		Board mount lens		Sharpness	0-255
Lens	Focal Length	3.6mm, F 2.0		OSD control	-
	Angle of View	94.91 (D)x81.9 (H)x66.5 (V)		Language	-
Min.Illumination		0.2 Lux (30IRE, F2.0, AGC MAX)		Video Output mode	CVBS(1.0Vp-p Composite 75Ω) NTSC/PAL
Gamma		γ=0.45		General	
IR LEDs		-		IP Rating	- IP67 (Waterproof Type)
IR Range		-		Operating Temperature	-10°C~+50°C(Humidity less than 80%)
White Balance		ATW / PUSH / USER1 / USER2 / MANUAL / PUSH LOCK		Storage Temperature	-20°C~+60°C(Humidity less than 80%)
Dynamic Range	WDR/BLC	WDR / ATR / OFF		Dimension(mm)	Φ19X54.8mm (Waterproof type)
	D-WDR	OFF / HLC / BLC		Weight	Approx.44.7g (Waterproof type)
	Level	138.1dB		Power Source	12VDC(±10%)
Electronic Shutter Speed		1/60(50)~1/100,000		Power Consumption	12VDC(±10%), 60mA max.
Digital Slow Shutter(DSS)		-			
Auto Gain Control(AGC)		MIN, 6, 12, 18, 24, 30, 36, 42, 48, MAX			
Day&Night		Electronic D&N			
Noise Deduction		2D-DNR (Y/C, Y, C, OFF)			
Motion Detection		-			